



# Installation Instructions

## Dodge Winch Bumper

Product Number: A2450-A2452

Application: 2010+ Dodge Ram HD

## SAFETY

### **Your safety and the safety of others is very important.**

- In order to help you make informed decisions about safety, we have provided installation instructions and other information.
- These instructions alert you to potential hazards that could hurt you or others.
- Please do a job safety analysis (JSA) before each task to identify potential hazards for your situation and remove/protect against them.
- You must use your own good judgment, and take your time.

**Read and understand all safety precautions and instructions before installing this product.**

THIS PRODUCT IS FOR OFFROAD USE ONLY. ALL LIABILITY FOR INSTALLATION AND USE RESTS WITH THE OWNER.

**CARELESS INSTALLATION AND OPERATION CAN RESULT IN SERIOUS INJURY OR EQUIPMENT DAMAGE.**

## Injury hazard

### **Failure to observe these instructions could lead to severe injury or death.**

- ☐ **Always** remove jewelry and wear eye protection.
- ☐ **Always** use extreme caution when jacking up a vehicle for work. Set emergency brake and use tire blocks. Locate and use the vehicle manufacturers designated lifting points. Use jack stands.
- ☐ **Always** use appropriate and adequate care in lifting components into place.
- ☐ **Always** insure components will remain secure during installation and operation.
- ☐ **Always** wear safety glasses when installing this kit. A drilling operation will cause flying metal chips. Flying chips can cause serious eye injury.
- ☐ **Always** use extreme caution when drilling on a vehicle. Thoroughly inspect the area to be drilled (on both sides of material) prior to drilling, and relocate any objects that may be damaged.
- ☐ **Always** use extreme caution when cutting and trimming during fitting.
- ☐ **Always** tighten all nuts and bolts securely per installation instructions.
- ☐ **Always** route electrical cables carefully. Avoid moving parts, components that become hot and rough or sharp edges.
- ☐ **Always** insulate and protect all exposed wiring and electrical terminals.
- ☐ **Always** perform regular inspections and maintenance on mounts and related hardware.



## Installation Instructions

### Dodge Winch Bumper

Product Number: A2450-A2452

Application: 2010+ Dodge Ram HD

#### I. Overview

Congratulations on your purchase of the industries' best and most stylish Dodge Winch Bumper! This bumper has been **engineered** for strength while keeping the weight down. It can accept the Warn 16.5 winch... and look cool doing it.

This product has also been **engineered** to allow alignment in three directions so you will end up with a very professional fit.

Your bumper was designed, cut, fabricated, and powder coated... all in the U.S.A.

Enjoy the fit and finish of a quality Dodge Winch Bumper from Fab Fours Inc!





## Installation Instructions

### Dodge Winch Bumper

Product Number: A2450-A2452

Application: 2010+ Dodge Ram HD

## II. Tools Required

- |  |  |
|--|--|
| <input type="checkbox"/> Electric Drill                          | <input type="checkbox"/> 3/4" Socket           |
| <input type="checkbox"/> 9/16" Drill bit                         | <input type="checkbox"/> 3/4" Open End Wrench  |
| <input type="checkbox"/> Electric Hand Grinder                   | <input type="checkbox"/> 7/16" Open End Wrench |
| <input type="checkbox"/> Pry Bar                                 | <input type="checkbox"/> 3/8" Open End Wrench  |
| <input type="checkbox"/> Socket Wrench With<br>Extension         | <input type="checkbox"/> 1/8" Allen Wrench     |
| <input type="checkbox"/> 10mm or 13mm Socket<br>(year dependent) | <input type="checkbox"/> 5/32" Allen Wrench    |
| <input type="checkbox"/> 18mm Socket                             | <input type="checkbox"/> Center punch          |
|  | <input type="checkbox"/> Hammer                |
|  | <input type="checkbox"/> Tin Snips             |

## III. Vehicle Preparation

1. (DIESEL ONLY) Open the hood and remove the dust shield covering the radiator and intercooler assembly.
2. (DIESEL ONLY) Remove the two screws attaching the intercooler to the top of the core support.

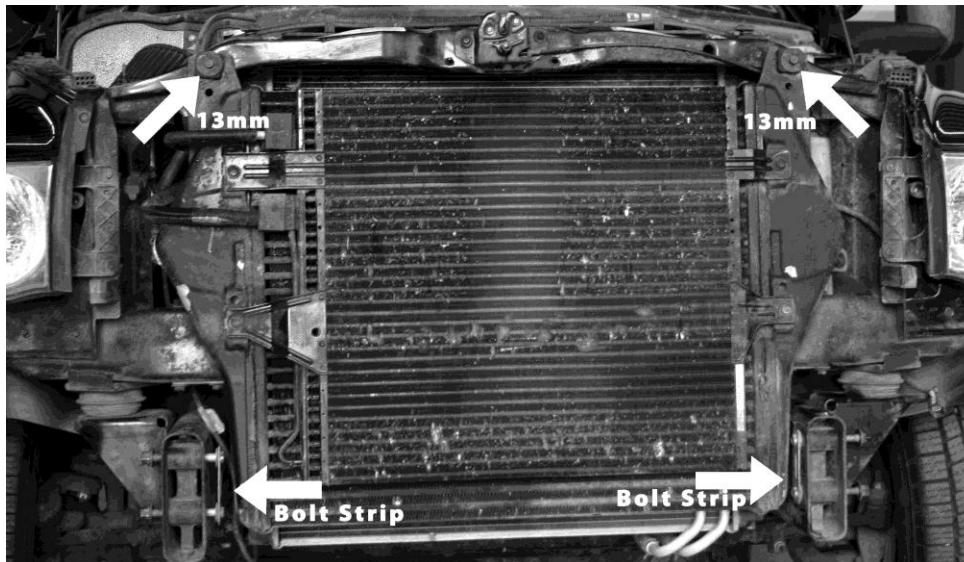


Figure 1 – Intercooler Fasteners

3. If equipped, unplug the OEM fog light harness front under the driver's side headlamp.
4. Remove the lower air dam by popping out the plastic push clips.

# Installation Instructions

## Dodge Winch Bumper

Product Number: A2450-A2452

Application: 2010+ Dodge Ram HD

5. With the bumper supported, remove the nuts and stud plates attaching the OEM bumper to the frame rail. On diesel equipped trucks, the cooling package must be lifted upward and forward to allow the stud plate to be pulled out of the frame in the gap between the radiator and intercooler. Use caution not to damage the intercooler or radiator fins while lifting the assembly.
6. Pull forward to remove the OEM bumper assembly and set aside.
7. If equipped, unbolt the under-run guards from the frame rails with a 24mm Socket.

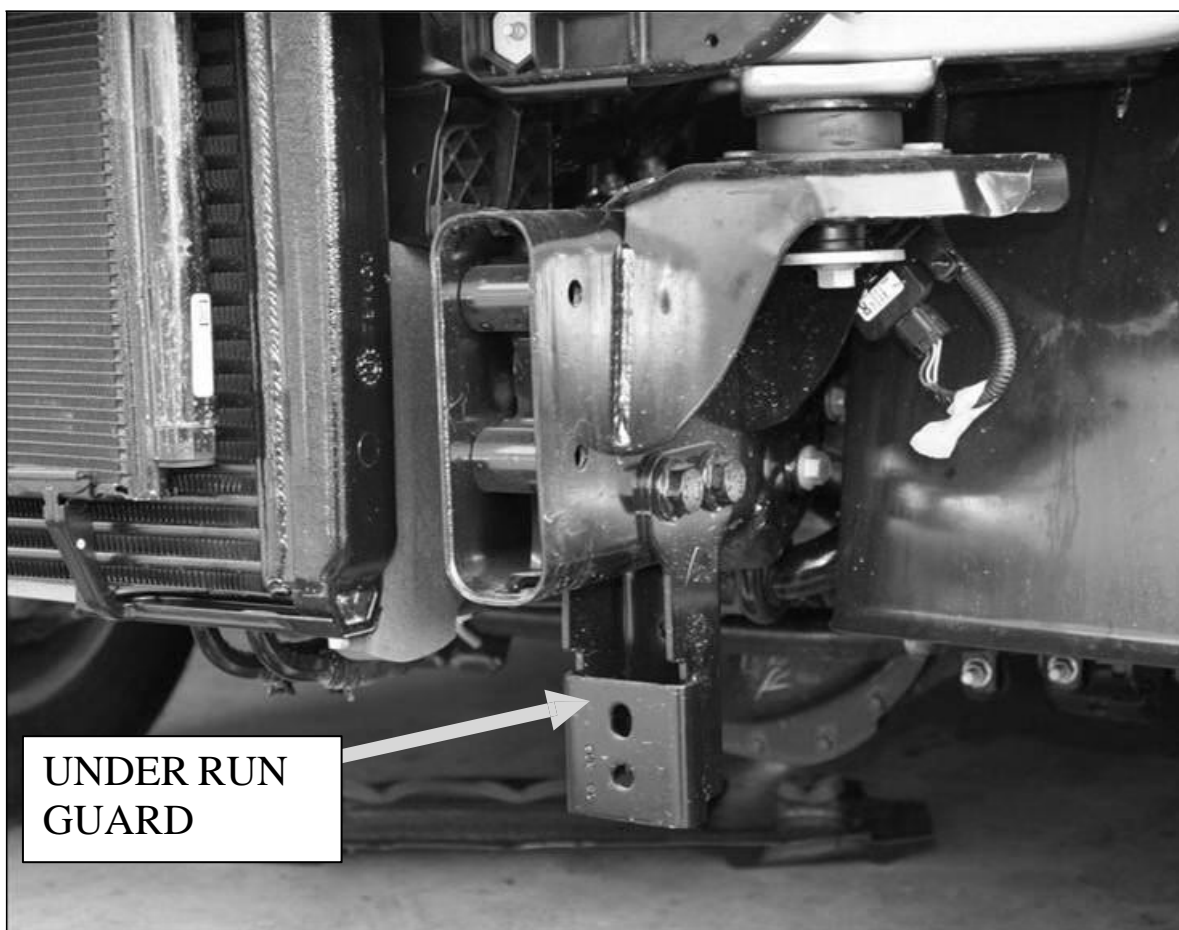


Figure 2 – FRAME UNDER RUN GUARD (IF EQUIPPED)

8. If the vehicle was not equipped with under run guards, two mounting holes need to be drilled in their place. (See Figure 3)




## Installation Instructions

### Dodge Winch Bumper


Product Number: A2450-A2452

Application: 2010+ Dodge Ram HD

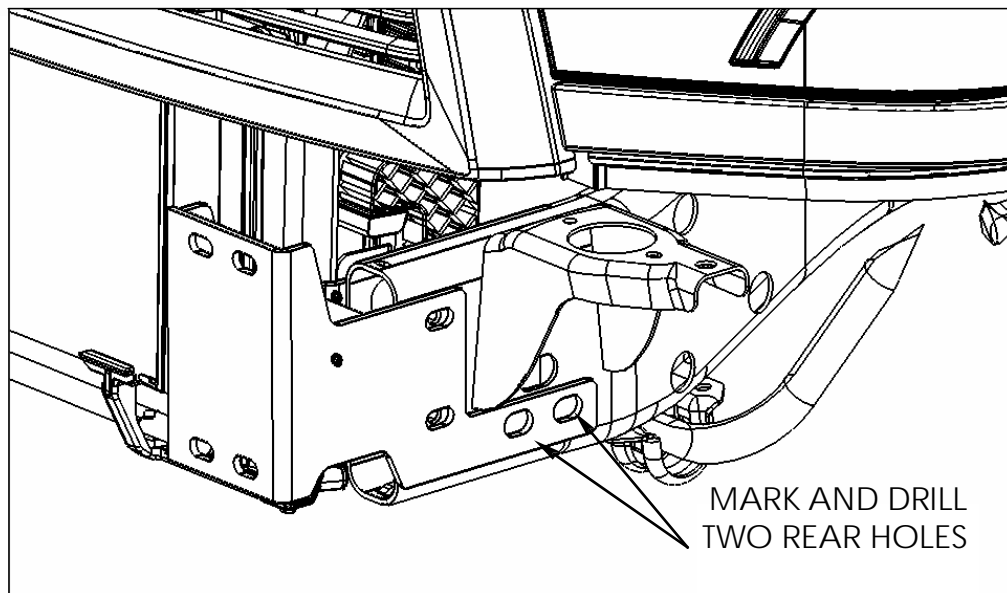

**Figure 3 – DRILLING LOCATIONS**

9. Use the frame bracket or the L-shaped template provided to drill two 9/16" holes through both sides of the frame rail. Be sure to inspect both sides of the frame for items that may be damaged by the drilling operation.

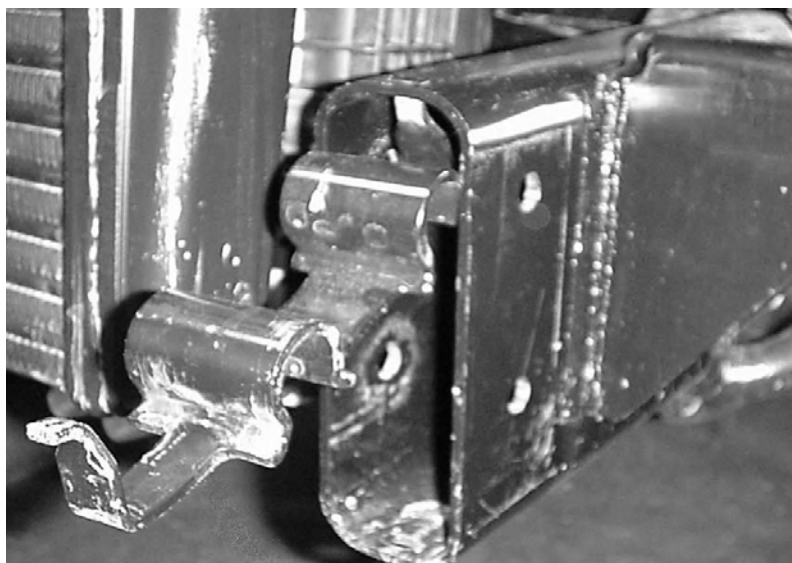


**Figure 4-Removal of OEM Anti-Crush Can**

10. Anti-crush spacers need to be installed inside the frame rail after the drilling operation. To get them into place, the OEM anti-crush spacers need to be removed. Use a large screwdriver to pry the anti-crush spacer out of the front of the frame rail; it is not necessary to completely remove it from frame. (see Figure 4)

## Installation Instructions Dodge Winch Bumper

Product Number: A2450-A2452  
Application: 2010+ Dodge Ram HD

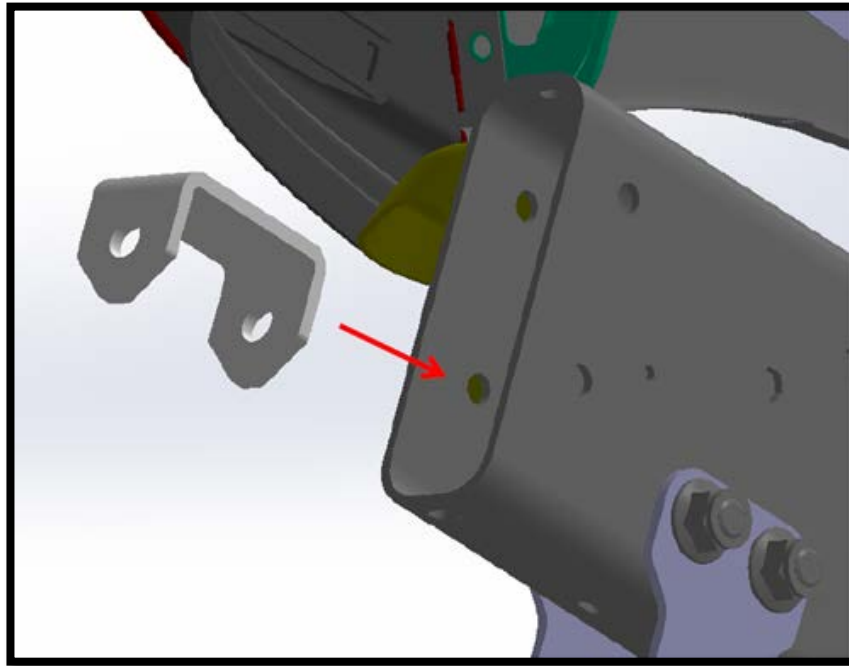

**Figure 5-Insert Provided Anti Crush Can**

- 11.** With the OEM spacer pulled up, insert the provided anti crush spacer into the frame rail and align it with the holes previously drilled. The spacer should form a box around the two hole pattern.
- 12.** Push the OEM anti-crush spacer back into the frame rail so it lines back up with the OEM bumper mounting holes.
- 13.** Repeat steps 10-12 for the opposite frame rail.
- 14.** Your Truck is now ready for the installation of your New FAB FOURS BUMPER!



## Installation Instructions


### Dodge Winch Bumper

Product Number: A2450-A2452

Application: 2010+ Dodge Ram HD

#### **IV. Lights and Wiring Installation**

1. Remove headlights following procedure in owner's manual. On each side, tap into the three turn indicator wires using supplied tap connectors (reference the wiring diagram).
2. Connect supplied turn indicator wiring harnesses to factory wires using supplied tap connectors; See below for wire color guide.
3. Replace headlights in reverse order of removal.
4. Tap into OEM fog light harness using two supplied tap connectors.
5. Connect supplied fog lamp wiring harness to tap connectors following wire color guide below.
6. Run passenger side fog lamp supply wires across bottom of bumper and tap into Fab Fours driver side fog lamp wires.
7. Install turn indicators into the plastic light insert using three self- tapping screws as shown below:

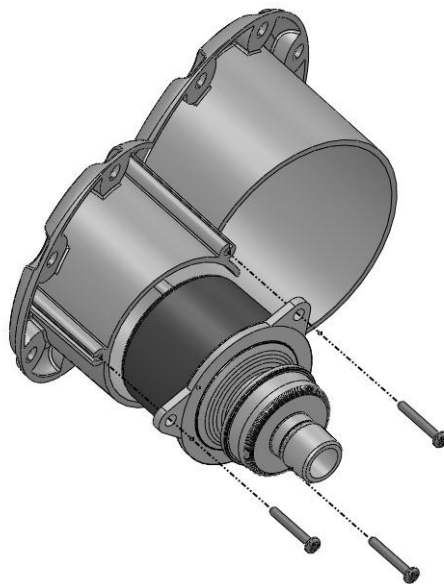

**Figure 6 – Turn Signal Installation**



## Installation Instructions

### Dodge Winch Bumper

Product Number: A2450-A2452

Application: 2010+ Dodge Ram HD

8. Install the light inserts with turn indicators into the cutout in the bumper. Use the  $\frac{3}{4}$ " length  $\frac{1}{4}$ " stainless steel button head,  $\frac{1}{4}$ " washers and hex nuts to fasten the insert through the holes shown below:

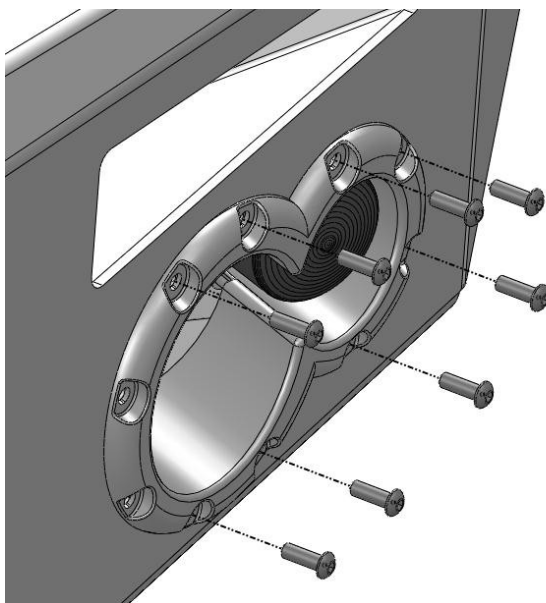


Figure 7 – Light Insert Installation

9. Install the Fab Fours fog lights onto the mounting brackets as shown below using the #8 button head screws, washers, and nylock hex nuts.

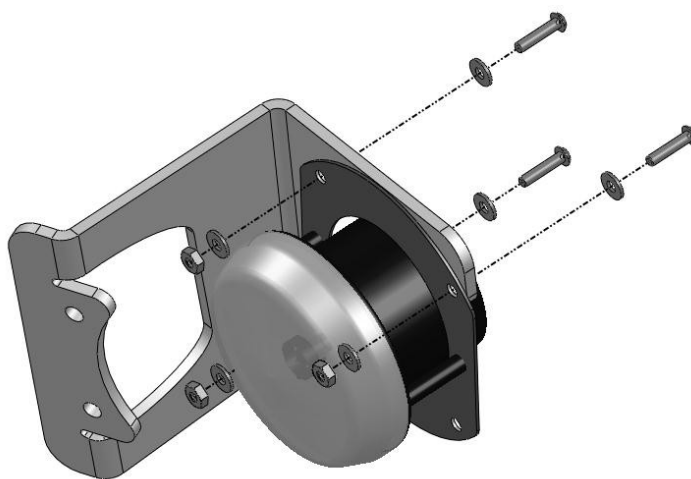


Figure 6 - Fog Light to Bracket Installation





## Installation Instructions

### Dodge Winch Bumper

Product Number: A2450-A2452

Application: 2010+ Dodge Ram HD

10. Install the fog light and bracket into the bumper using the remaining two holes available in the light insert. Use the 1-1/2" length 1/4" stainless steel button heads with 1/4" washers and nylock nuts:

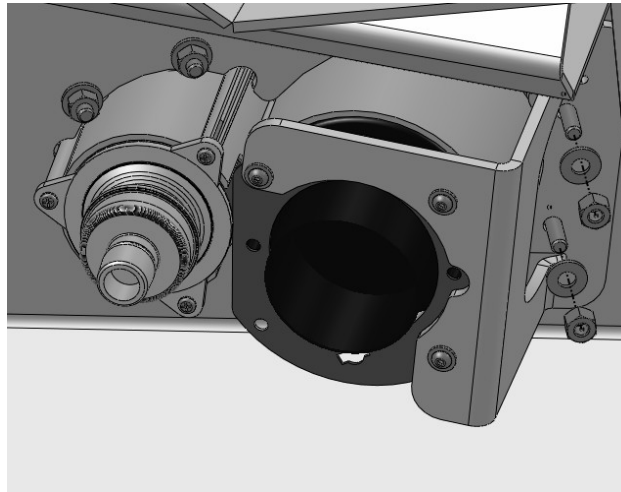


Figure 7 - Fog Light Installation

11. Repeat steps 7-10 for other side.

 **Do not connect wiring harnesses to lights until bumper is installed.**

#### **Driver Side Turn Indicator at Headlight**

OEM (Running) → White Fab Fours

OEM (Turn) → Red Fab Fours

OEM (Ground) → Green Fab Fours

#### **Passenger Side Turn Indicator at Headlight**

OEM (Running) → White Fab Fours


OEM (Turn) → Red Fab Fours

OEM (Ground) → Green Fab Fours

#### **Fog Lamp**

OEM (Power) → Red Fab Fours

OEM (Ground) → Green Fab Fours

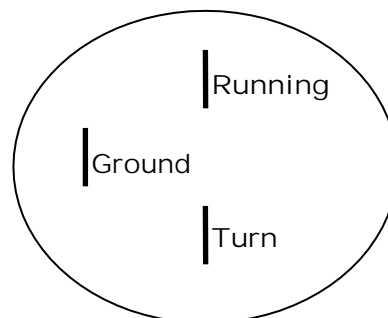



## Installation Instructions

### Dodge Winch Bumper

Product Number: A2450-A2452

Application: 2010+ Dodge Ram HD

#### V. Bumper Installation

- **Optional:** If installing winch and roller fairlead into bumper, do it at this time. Follow the winch manufacturer's instructions for installation. If you are installing a winch with a pulling capacity of 12,000 lbs. or greater, the front face mounting holes must be used.

If not installing a winch, a license plate may be installed onto the front face of the bumper using the provided 1/4" hardware.

1. Install intermediate mount onto the frame rail using the OEM bumper stud plates and nuts, and 9/16" x 4.0" bolts, washers, lock washers and nuts provided in the hardware kit as shown below. OEM stud plates do not need to be reinstalled from the inside of the frame. **DO NOT FULLY TIGHTEN**, repeat for other side.

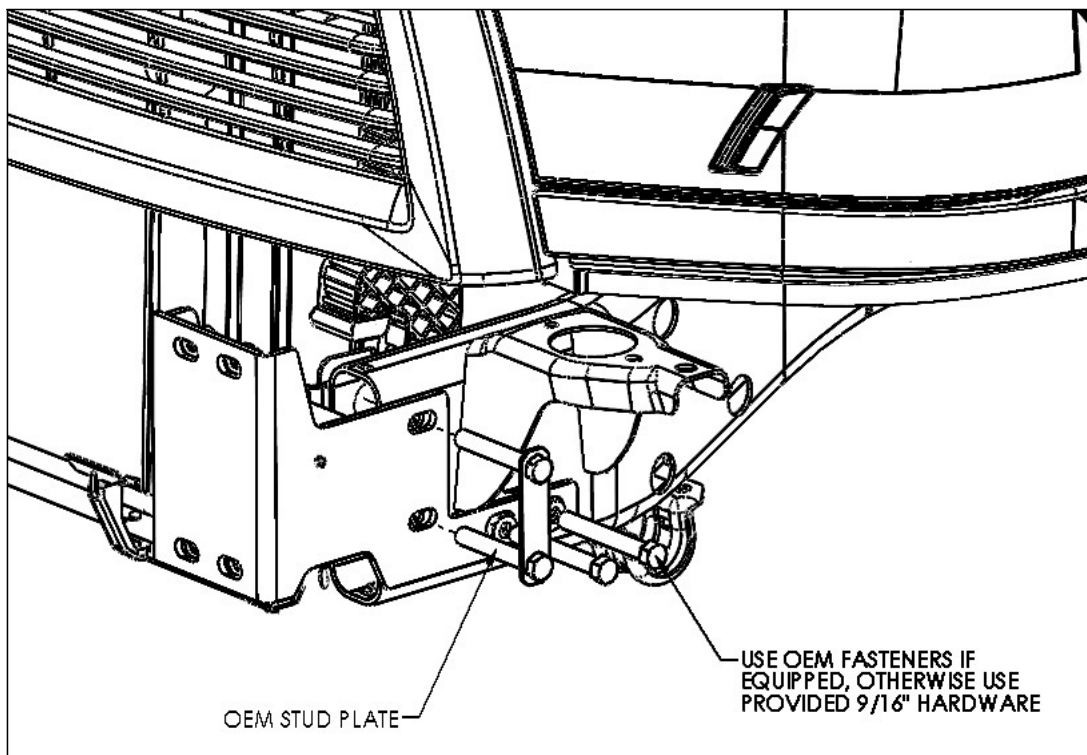


Figure 8 - Intermediate Bracket Installation



## Installation Instructions

### Dodge Winch Bumper

Product Number: A2450-A2452

Application: 2010+ Dodge Ram HD

2. Insert the provided stud plate assemblies through the back of the bumper mount face as shown below.

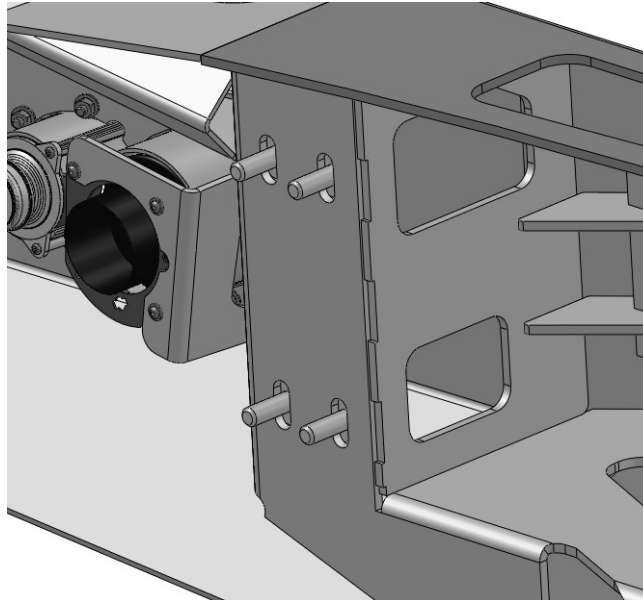


Figure 9 – Stud Plate Orientation

3. Lift the bumper and carefully insert the studs into the slots on the mounting brackets. With the bumper supported, install four nuts, washers, and lock washers per side onto the studs. **DO NOT FULLY TIGHTEN**

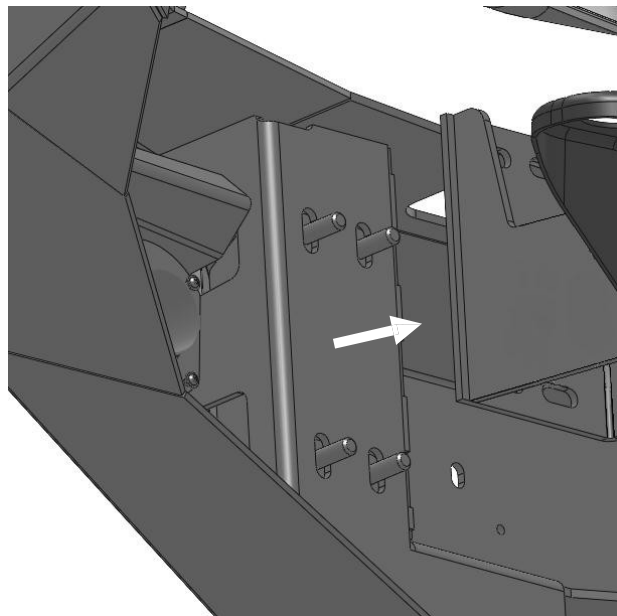


Figure 10 – Bumper Installation



## Installation Instructions



### Dodge Winch Bumper

Product Number: A2450-A2452

Application: 2010+ Dodge Ram HD

4. Adjust the bumper to achieve good visual alignment as follows:
  1. Adjust in/out bumper alignment with mounting bracket to frame hardware.
  2. Adjust up/down and left/right alignment with bumper to mounting bracket hardware
5. Tighten all fasteners fully; beginning with frame mounts. Then tighten all mount-to-bumper fasteners.
6. Connect wiring harnesses to lights as shown in wiring diagram.
7. Verify proper operation of lights. **Note:** Turn indicators should be dim during “running” condition and flash bright for turn.

## VI. Maintenance/Care

-  Periodically check and tighten all fasteners.
-  Stripped, fractured, or bent bolts or nuts need to be replaced.

## VII. Contact Information

Fab Fours Inc.  
1312 Camp Creek Rd.  
Lancaster, SC 29720

Phone (866)-385-1905  
Fax (866)-574-1424  
Email [Support@fabfours.com](mailto:Support@fabfours.com)



**More than expected ... Better than expected**