



Installation Instructions

Chevy 1500 BS Front Bumper

Product Number: K3060, K3061, K3062
R3060, R3061, R3062

Application: '14 Chevy 1500

SAFETY

Your safety and the safety of others is very important.

- In order to help you make informed decisions about safety, we have provided installation instructions and other information.
- These instructions alert you to potential hazards that could hurt you or others.
- Please do a job safety analysis (JSA) before each task to identify potential hazards for your situation and remove/protect against them.
- You must use your own good judgment, and take your time.

Read and understand all safety precautions and instructions before installing this product.

THIS PRODUCT IS FOR OFFROAD USE ONLY. ALL LIABILITY FOR INSTALLATION AND USE RESTS WITH THE OWNER.

CARELESS INSTALLATION AND OPERATION CAN RESULT IN SERIOUS INJURY OR EQUIPMENT DAMAGE.

INJURY & HAZARD

Failure to observe these instructions could lead to severe injury or death.

- ☐ Always remove jewelry and wear eye protection.
- ☐ Always use extreme caution when jacking up a vehicle for work. Set emergency brake and use tire blocks. Locate and use the vehicle manufacturers designated lifting points. Use jack stands.
- ☐ Always use appropriate and adequate care in lifting components into place.
- ☐ Always insure components will remain secure during installation and operation.
- ☐ Always wear safety glasses when installing this kit. A drilling operation will cause flying metal chips. Flying chips can cause serious eye injury.
- ☐ Always use extreme caution when drilling on a vehicle. Thoroughly inspect the area to be drilled (on both sides of material) prior to drilling, and relocate any objects that may be damaged.
- ☐ Always use extreme caution when cutting and trimming during fitting.
- ☐ Always tighten all nuts and bolts securely per installation instructions.
- ☐ Always route electrical cables carefully. Avoid moving parts, components that become hot and rough or sharp edges.
- ☐ Always insulate and protect all exposed wiring and electrical terminals.
- ☐ Always perform regular inspections and maintenance on mounts and related hardware.





Installation Instructions

Chevy 1500 BS Front Bumper

Product Number: K3060, K3061, K3062

R3060, R3061, R3062

Application: '14 Chevy 1500

I. Overview

Congratulations on your new purchase of the industry's best and most stylish Front Bumper available for the 2014 CHEVY 1500! This Bumper has been engineered for strength while keeping the weight down.

Your Front Bumper designed in 3-D from digitized data, CNC laser cut, fabricated, and powder coated... all in the U.S.A.

Enjoy the fit and finish of a quality CHEVY 1500 Front Bumper from Fab Fours Inc.





Installation Instructions

Chevy 1500 BS Front Bumper

Product Number: K3060, K3061, K3062

R3060, R3061, R3062

Application: '14 Chevy 1500

Parts List

- K/R306X replacement bumper
- K186X-HW fastener kit
- Instruction Manual

Tools Required

- Socket Wrench with Extension (Ratcheting wrenches may also be convenient)
- 7mm , 15mm , & 18mm Sockets and Box End Wrenches
- T15 torx
- Flat Head Screw Drivers
- Floor Jack and wood block.

II. Removal of OEM Bumper

Note: Save all OEM parts until installation is complete. You will reuse factory hardware to install your Fab Fours bumper.

- A. Open hood and locate push pins on radiator cover. Using a flat head screw driver, pull the head of the push pins up, remove push pin and lift radiator cover off. This will allow access to top grill bolts (Ref. Figure 1).



Figure 1





Installation Instructions

Chevy 1500 BS Front Bumper

Product Number: K3060, K3061, K3062
R3060, R3061, R3062

Application: '14 Chevy 1500

- B. Remove the valence from the vehicle. Unfasten the screws located in the forward section of each wheel well connecting the wheel well liner and the trim to the vehicle (Ref. 2a). Carefully pull both the trim and liner away from the vehicle, this will grant access to the interior cavity (Ref. 2b).**



Figure 2a



Figure 2b

- C. At this point the corner of the valence may still be held in place by the black "backing support" secured to the frame by hex head screws, use a 7mm short socket or ratchet wrench to unscrew. The color coded arrows show the location and direction of screws (Ref. 2c-d). Corners of valence should easily pull away. Locate retaining clips at bottom of valence. Depress clips and begin to remove valence as each clip is released.**

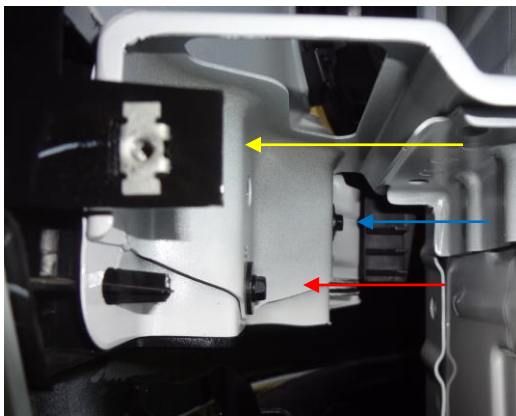


Figure 2c

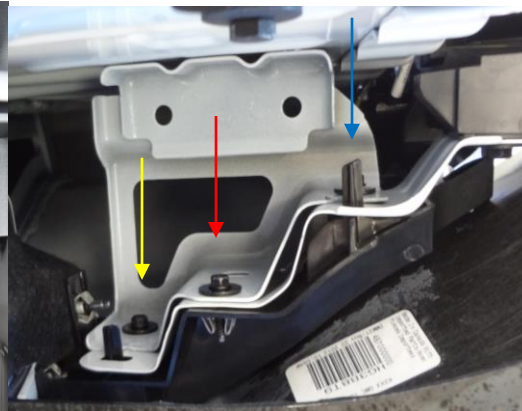


Figure 2d





Installation Instructions Chevy 1500 BS Front Bumper

Product Number: K3060, K3061, K3062

R3060, R3061, R3062

Application: '14 Chevy 1500

- D. Disconnect electrical harness from vehicle.

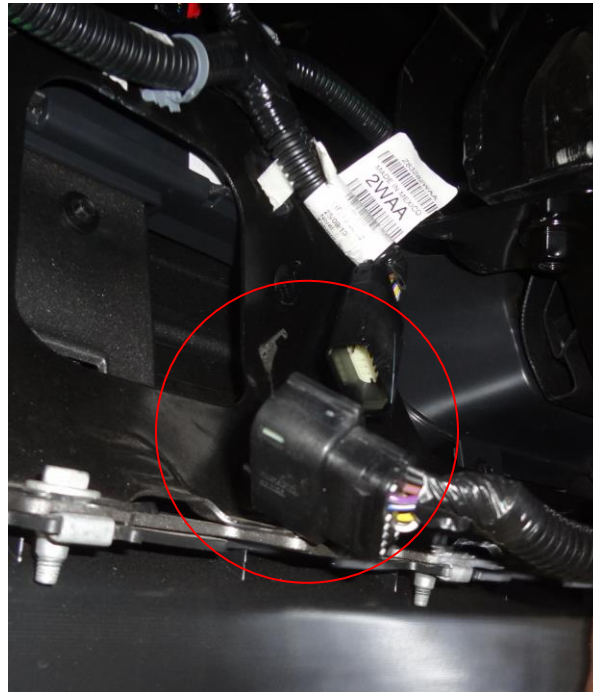


Figure 3(electrical harness disconnected)

- E. Remove the fasteners connecting the grill to the frame. Eight bolts, indicated by the red ovals, are located at the top and bottom of the grille and two bolts are located behind the grille (Ref. Figure 4a-b).

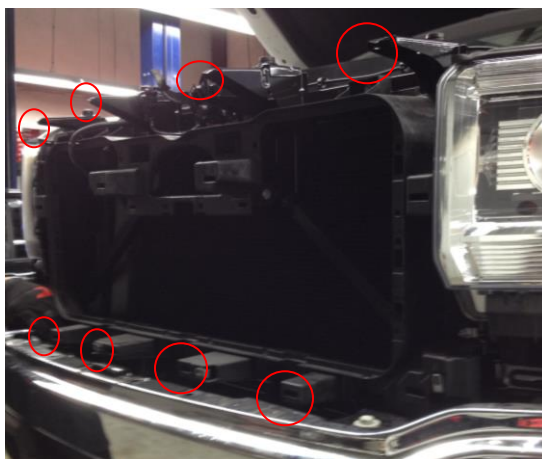


Figure 4a



Figure 4b





Installation Instructions Chevy 1500 BS Front Bumper

Product Number: K3060, K3061, K3062

R3060, R3061, R3062

Application: '14 Chevy 1500



Figure 4c



Figure 4d

- F. Remove the fasteners connecting the Bumper to the frame. Using a socket/wrench remove bolts from the top and bottom of bracket connected to the bumper. Pull bumper away from vehicle and remove forward facing bolts holding bracket to frame. Repeat process on each side of vehicle.



Figure 5





Installation Instructions Chevy 1500 BS Front Bumper

Product Number: K3060, K3061, K3062

R3060, R3061, R3062

Application: '14 Chevy 1500

- G. Remove bolts securing tow hooks to frame. Location is indicated in image below by green rectangle (Ref. 6b).



Figure 6a

Figure 6b

- H. Replace valence and grill by reversing the order of Removal steps A through E
- I. Remove OEM electrical harness from bumper. Disconnect harness from fog lights and sensors. Pop out plastic clips holding harness to bumper on both sides and carefully pull away.
- J. Remove OEM electrical harness from bumper. Disconnect harness from sensors. Pop out plastic clips holding harness to bumper. Remove fog lights from bumper by unbolting black support frame and unscrewing fog lamp housing from flanges on both sides (Ref. Figure 7b).





Installation Instructions

Chevy 1500 BS Front Bumper

Product Number: K3060, K3061, K3062

R3060, R3061, R3062

Application: '14 Chevy 1500



Figure 7a



Figure 7b





Installation Instructions

Chevy 1500 BS Front Bumper

Product Number: K3060, K3061, K3062
R3060, R3061, R3062

Application: '14 Chevy 1500

III. Front Bumper Installation

- A. Install Fog light housing in Fab Fours bumpers. Slide housing into position and using the OEM screws secure fog light in place (Ref. Figure 8). Attach OEM electrical harness to Fab Fours Bumper and connect fog light to harness.

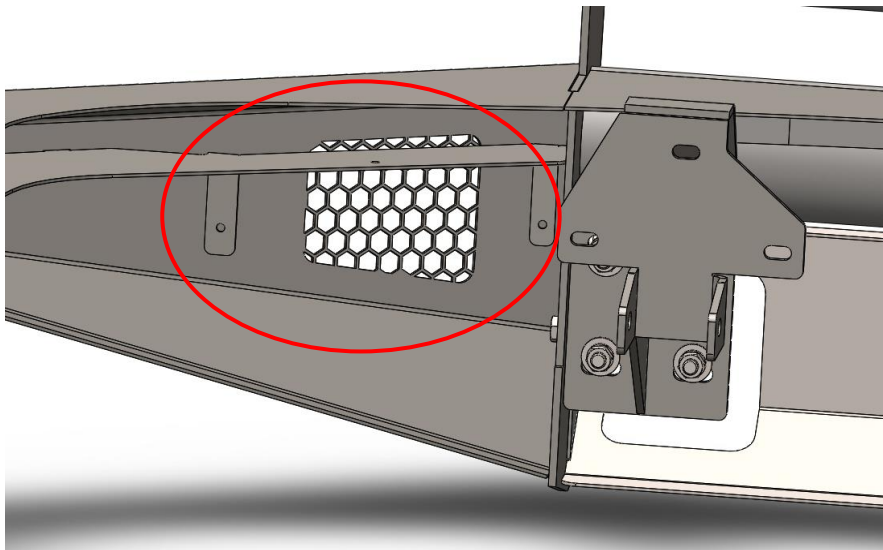


Figure 8

- B. Mount bracket to truck frame. Three bolts pass through the front of the frame and are indicated by the red boxes. One bolt passes through the side of the frame (i.e. cross bolt) and is indicated by the blue circles. All bolts should be hand tight to allow for adjustment (Ref. Figure 9a-c).





Installation Instructions Chevy 1500 BS Front Bumper

Product Number: K3060, K3061, K3062

R3060, R3061, R3062

Application: '14 Chevy 1500

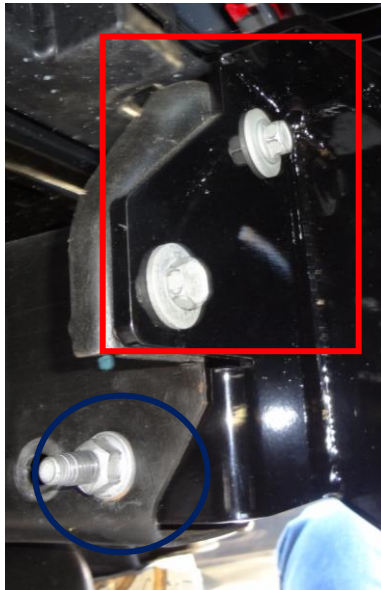


Figure 9a

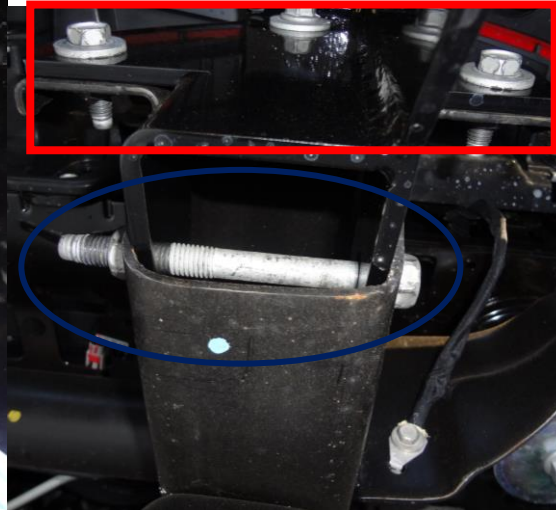


Figure 9b



Figure 9c

- C. Mount bracket to bumper. With the help of at least two others, and a floor jack, to support the center of the bumper, lift the Fab Fours bumper into place and insert ½ in. bolts (Ref. Figure 10).





Installation Instructions

Chevy 1500 BS Front Bumper

Product Number: K3060, K3061, K3062
R3060, R3061, R3062

Application: '14 Chevy 1500

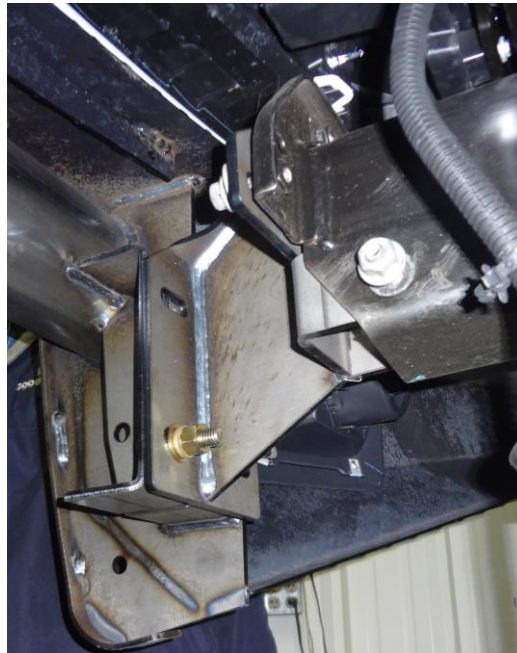


Figure 10

- D. Align the bumper side to side and top to bottom to ensure a perfect fit to the truck. Allow at least 0.375" of clearance to all painted surfaces if possible. This is to allow for frame flex!
- E. Fully tighten all fasteners between bumper and brackets as well as brackets and frame.

Note: Do Not Over Tighten "Cross Bolt". Frame Should Not Compress!

- F. Mount lower guard. Align lower guard with top two holes and bolt in place. Bolt in preferred direction (Ref. Figure 11).





Installation Instructions Chevy 1500 BS Front Bumper

Product Number: K3060, K3061, K3062

R3060, R3061, R3062

Application: '14 Chevy 1500

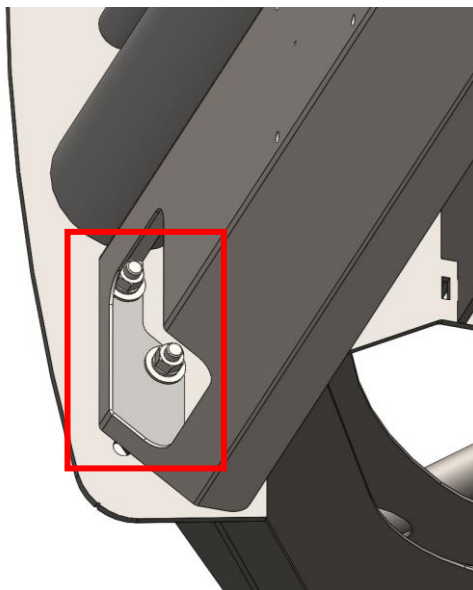


Figure 11

- G. Reconnect OEM electrical harness to truck and test lights.
- H. Enjoy your New Rear Replacement Bumper from Fab Fours!





Installation Instructions

Chevy 1500 BS Front Bumper

Product Number: K3060, K3061, K3062

R3060, R3061, R3062

Application: '14 Chevy 1500

Maintenance/Care

- ☐ Periodically check and tighten all fasteners.
- ☐ Stripped, fractured, or bent bolts or nuts need to be replaced.
- ☐ After washing of the vehicle make sure to fully dry all surfaces

IV. Contact Information

Fab Fours Inc.
1312 Camp Creek Rd
Lancaster, SC 29720

Phone (866)-385-1905
Fax (866)-574-1424
Email Support@fabfours.com



More than expected... Better than expected

Figure 8c

