

Product Number: S/Q416X Application: 2017 FORD SUPER DUTY

Your safety and the safety of others is very important.

- In order to help you make informed decisions about safety, we have provided installation instructions and other information.
- These instructions alert you to potential hazards that could hurt you or others.
- Please do a job safety analysis (JSA) before each task to identify potential hazards for your situation and remove/protect against them.
- You must use your own good judgment, and take your time.

Read and understand all safety precautions and instructions before installing this product.

THIS PRODUCT IS FOR OFFROAD USE ONLY. ALL LIABILITY FOR INSTALLATION AND USE RESTS WITH THE OWNER.

CARELESS INSTALLATION AND OPERATION CAN RESULT IN SERIOUS INJURY OR EQUIPMENT DAMAGE.

SENSORS FIELD OF VIEW WILL BE ALTERED WITH USE OF THE REPLACEMENT BUMPER.

Injury hazard

ŀ	<u> Failure t</u>	<u>o observe</u>	these instr	<u>uctions coulc</u>	<u>d lead to</u>	<u>severe in</u>	ury or o	<u>leath.</u>
_								

ıre	to observe these instructions could lead to severe injury or death.
	Always remove jewelry and wear eye protection. Always use extreme caution when jacking up a vehicle for work. Set emergency
	brake and use tire blocks. Locate and use the vehicle manufacturers designated
	lifting points. Use jack stands.
	Always use appropriate and adequate care in lifting components into place.
	Always insure components will remain secure during installation and operation
	Always wear safety glasses when installing this kit. A drilling operation will
	cause flying metal chips. Flying chips can cause serious eye injury.
	Always use extreme caution when drilling on a vehicle. Thoroughly inspect the
	area to be drilled (on both sides of material) prior to drilling, and relocate any
	objects that may be damaged.
	Always use extreme caution when cutting and trimming during fitting.
	Always tighten all nuts and bolts securely per installation instructions.
	Always route electrical cables carefully. Avoid moving parts, components that
	become hot and rough or sharp edges.
	Always insulate and protect all exposed wiring and electrical terminals.
	Always perform regular inspections and maintenance on mounts and related
	hardware.



Product Number: S/Q416X Application: 2017 FORD SUPER DUTY

I. Overview

Congratulations on your purchase of the industries' best and most stylish Ford Super Duty Winch Bumper! This bumper has been **engineered** for strength while keeping the weight down.

This product has also been **engineered** to allow alignment in three directions so you will end up with a very professional fit.

Your bumper was designed in 3-D, fabricated, and powder coated... all in the U.S.A.

Enjoy the fit and finish of a quality Ford Super Duty Winch Bumper from Fab Fours Inc!





Product Number: S/Q416X Application: 2017 FORD SUPER DUTY



Product Number: S/Q416X Application: 2017 FORD SUPER DUTY

II. Vehicle Preparation


1. Start by removing four bolts around tow hook on each side of vehicle. This will require an 18mm socket.



2. Next with the help of someone holding the bumper in place, remove the four 15mm bolts from the bumper support on both sides of vehicle.



Product Number: S/Q416X Application: 2017 FORD SUPER DUTY

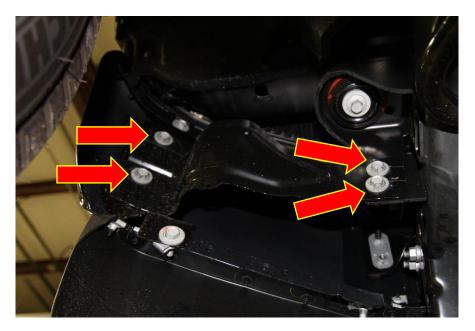

- 3. The bumper is now ready for removal. (Be careful when removing bumper if vehicle has a block heater as this will have to be unplugged during this step.)
- 4. With the bumper off the vehicle, you can now remove the tow hooks by removing the four 18mm bolts located under the top of frame rail.




Product Number: S/Q416X Application: 2017 FORD SUPER DUTY



5. Next using 18mm socket remove the two nuts on either side of the frame attaching frame horns to frame. Set bolt strips and nuts aside as they will be used in the installation of Fab Fours bumper. (See image)



Product Number: S/Q416X Application: 2017 FORD SUPER DUTY

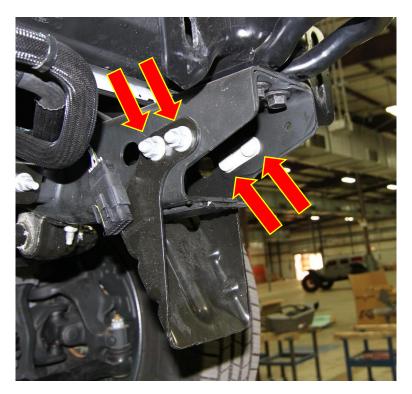



Product Number: S/Q416X Application: 2017 FORD SUPER DUTY

III. Winch Bumper Installation

NOTE: The following installation steps apply to the installation of the bumper to the vehicle. PLEASE READ THE ENTIRE MANUAL BEFORE ATEMPTING INSTALLATION! Ignoring these steps will increase your probability of scratching the vehicle during product installation!

1. Remove the bumper from the shipping carton. Lay all items out on a blanket to prevent damage to the powder coating. Install lower guard (IF INSTALLING A WINCH, REFER TO WINCH TRAY INSTALLATION INSTRUCTIONS) by rotating it into position from the bottom of the bumper as shown below. Install three ½" fasteners (as provided in hardware bag labeled 20260-HW) per side with bolt heads facing the inside of the bumper.



Product Number: S/Q416X Application: 2017 FORD SUPER DUTY

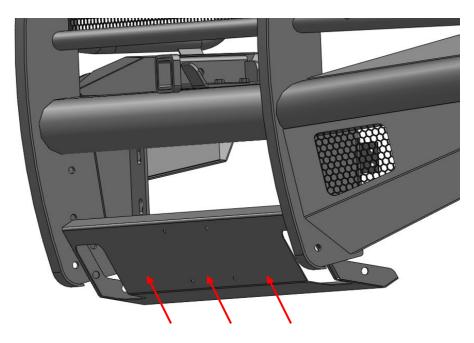


Figure 1 - Lower Guard Installation

2. **OPTIONAL:** If you wish to retain the stock fog lamps, remove the lights from the stock bumper and reinstall using OEM hardware in the provided brackets behind the protective mesh. It is necessary to remove the adjuster screw prior to installation. With the fog light clipped in the bracket, reinstall the adjuster screw to clamp the light in




Product Number: S/Q416X

Application: 2017 FORD SUPER DUTY

place.



3. **OPTIONAL:** If installing your bumper with D-ring shackle mounts, they should be placed inside the bumper mounting brackets before final installation. Insert the shackle mounts from the front of the bumper as shown below.



4. **OPTIONAL**: If installing the 2" receiver hitch accessory, attach it to the bumper with the provided ½" hardware



Product Number: S/Q416X Application: 2017 FORD SUPER DUTY


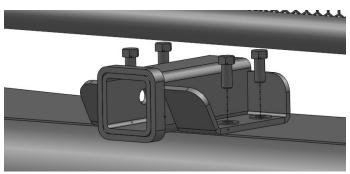


Figure 2 - Hitch Installation

5. Install Fab Fours mounting bracket using OEM bolt strips on either side of frame and then supplied M14 hardware into top of frame as shown below. Do not fully tighten the hardware.



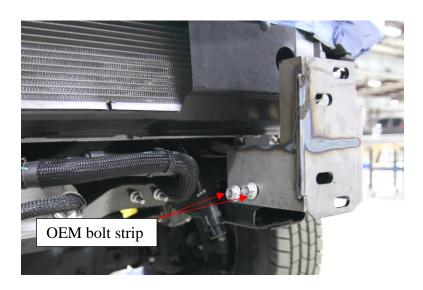

Product Number: S/Q416X Application: 2017 FORD SUPER DUTY



- 6. Once the brackets loosely installed, with the help of two other people, lift the bumper into place.
- 7. With the bumper in place loosely install ½" hardware securing bumper to brackets.
- 8. Next hold the bumper into desired position on the truck. NOTE: Fab Fours recommends a MINIMUM gap of 3/8" at the outer fenders and headlights to prevent paint damage in normal operation.
- 9. With the bumper in position you can now tighten hardware. Tighten all fasteners fully; beginning with frame mounts. Then tighten all mount-to-bumper fasteners.

OPTIONAL: Trim the inner fender liners to match the higher clearance of your Fab Fours bumper. This can be done with a body saw, rotary tool, or sharp utility knife (New blade strongly recommended). **USE CAUTION WHEN PERFORMING ANY**




Product Number: S/Q416X

Application: 2017 FORD SUPER DUTY

CUTTING OPERATION TO PREVENT VEHICLE DAMAGE OR PERSONAL INJURY.

10.Install the supplied tow hooks in the orientation shown below (Open to the inside and on the outside of the brace) using the supplied ½"-13 bolts, washers, and nuts.

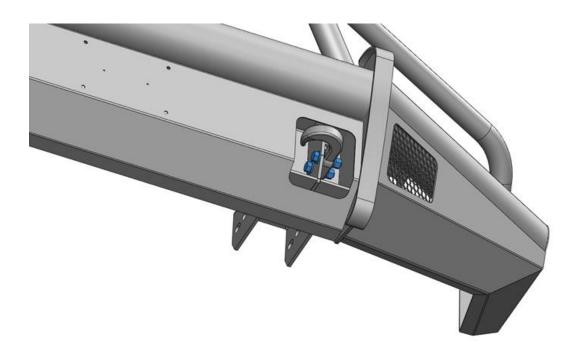

IV. Maintenance/Care

	Periodically	check	and	tighten	all	fasteners.
--	--------------	-------	-----	---------	-----	------------

- ☐ Stripped, fractured, or bent bolts or nuts need to be replaced.
- ☐ Keep all surfaces free of dirt, road grime, and standing water to ensure finish longevity.


V. Contact Information

Fab Fours Inc. Phone (866)-385-1905



Product Number: S/Q416X Application: 2017 FORD SUPER DUTY

2213 Industrial Park Rd. Lancaster, SC 29720 Fax (866)-574-1424 Email Support@fabfours.com

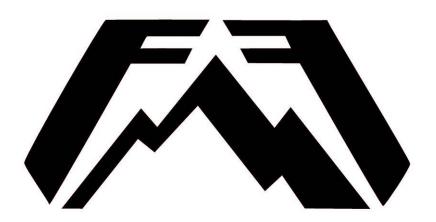

More than expected... Better than expected